

FFL12-5-60 Triac/Phase Dim. Constant Voltage 12VDC 300W (5×60W)

FEATURES


- 24V DC, 100-277VAC
- Class 2 Output
- Constant Voltage, Multi-Channel
- UL Dry & Damp location rated
- Efficiency <91%
- Overload, Short circuit, Over temperature protection
- Black, powder coated Aluminum housing
- Suitable for LED lighting




SPECIFICATION

Output Voltage (DC)	24V
Rated Current	5.5A
Rated Power	300W (5×60W)
Input Voltage Range (VAC)	100-277VAC
Input Current	2.2A@100VAC
Frequency Range	47-63Hz
Protection	Short Circuit Over Loading Over Temperature
Working Temperature	-40°C~+60°C
IP Rating	IP67
Safety Standards	UL8750
Weight	2.6Kg

DERATING CURVE

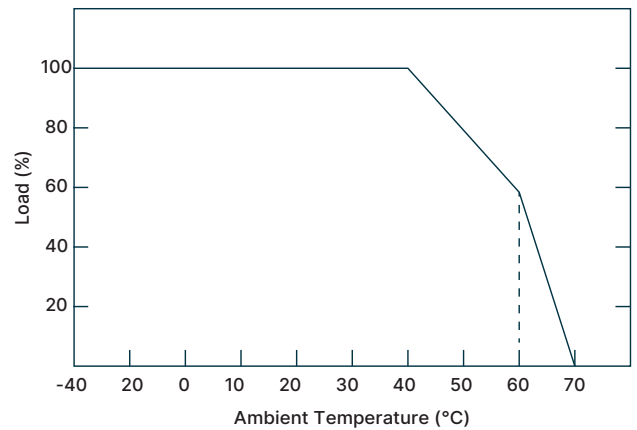

WIRING

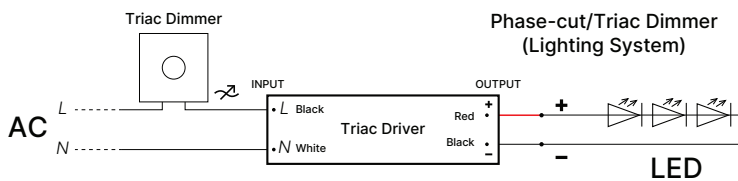

DIMENSIONS

